




## CLS Lina Suspended HP linear lighting fixture

|                      |   |
|----------------------|---|
| Type                 | : Suspended hanging Linear lighting fixture in 11, 22, 33, 44 & 55 Watt (11 watt per 25 cm PCB)             |
| Colour               | : White coated, black anodized or anodized blank  |
| Material             | : Aluminium, polycarbonate and PC/ABS V0  |
| Weight               | : Depending on length   |
| IP Rating            | : IP40  |
| Length               | : Configurable, 30, 55, 80, 105 & 130 cm  |
| Optics               | : Configurable: 12°, 19°, 32°, 58°, 120° & 14 x 36° beam angle  |
| Light source         | : Lumileds: Luxeon Z ES   |
| Colour Temperature   | : 2700K, 3000K, 4000K<br>Other colours on request (MOQ)   |
| CRI                  | : >80   |
| Drive current        | : 700mA   |
| Driver               | : Excluded  |
| Power factor         | : 1-10V driver >90  |
| Dimming              | : 1-10V or DMX 512  |
| Remarks              | : Prismatic front cover for more visual comfort<br>Suspended cable length 180 cm, longer lengths on request |
| Optional accessories | : X   |
| Connection           | : Wire  |
| Life time            | : Up to 50.000 hours  |
| Warranty             | : 3 years   |
| Origin               | : Designed and manufactured in the Netherlands  |

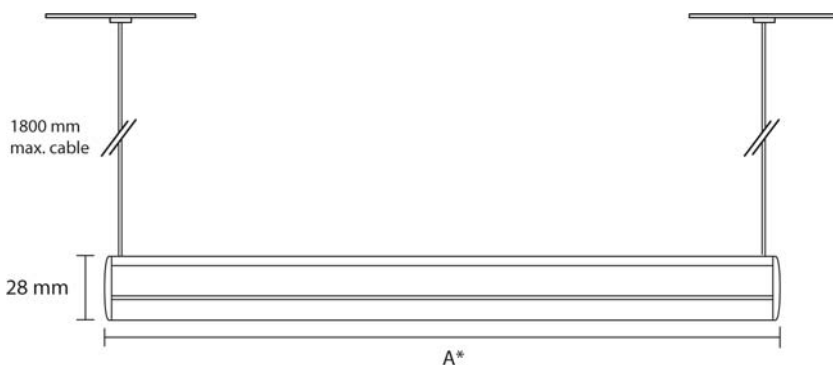

| A       | Model                    |
|---------|--------------------------|
| 296 mm  | Lina Suspended HP 30 cm  |
| 546 mm  | Lina Suspended HP 55 cm  |
| 796 mm  | Lina Suspended HP 80 cm  |
| 1046 mm | Lina Suspended HP 105 cm |
| 1296 mm | Lina Suspended HP 130 cm |

