


## Light Specifications

### Technical sheet: L1

**Project name:**

**Project number:**

#### Technical Description: Luxor LED Spot Downlight

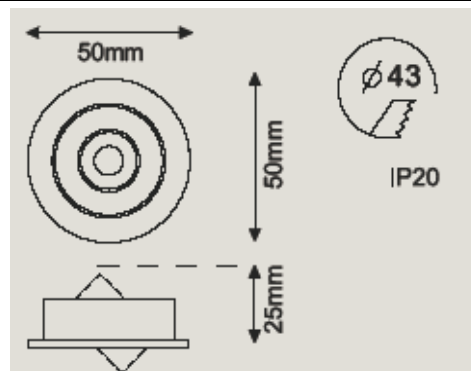

#### Can be used with

- All indicated LEDdrivers
- Click and Go system

#### Led

|                   |                                 |
|-------------------|---------------------------------|
| New Reference     | : KL876642                      |
| Old Referece      | : L05420                        |
| Type              | : LED spot                      |
| Angle             | : 35°                           |
| Input voltage     | : 230V                          |
| LEDdriver voltage | : 12V 350-700mA                 |
| Lifetime          | : Min. 50.000 Hours             |
| Dimmable          | : Yes, with driver dim Lumotech |

#### Module

|                    |                      |
|--------------------|----------------------|
| Size               | : Ø50mm x 25mm       |
| Cut-out            | : Ø43mm              |
| Rotation           | : 45°                |
| Material of module | : Anodized Aluminium |
| Colour             | : Aluminium*         |
| Connection         | : Cable 1M + plug    |
| Protection         | : IP44               |
| Energy class       | : A++                |

| Colour                   | Kelvin | Lumen | Watt |
|--------------------------|--------|-------|------|
| Warm White               | 3000K  | 180Lm | 2,3W |
| Natural White            | 4000K  | 190Lm | 2,3W |
| Cool White               | 6000K  | 210Lm | 2,3W |
| Red, amber green or blue |        |       | 2,3W |

**Note:**      \*Available in white or black  
Version 12/24V AC/DC available

#### Supplier

Chainlight Lighting Systems  
Rua Fernão Vilarinho lote 15 BI B, loja 6  
8600-315 Lagos - Portugal

Tel: +351 282778128  
www.chainlight.pt E-mail: info@chainlight.eu