



ARCHITECTONIC PATH LIGHTING

**A special luminaire with a LED module that is placed between two 5 MM thick aluminum plates. The luminaire is equipped with a black plastic POM base. You can fix this luminaire direct on a surface or in the ground with the separately ordered grounding pin.**

**ray**  
45 / 70

## SPECIFICATIONS

## RAY 45 / 70

HEIGHT	45 CM / 70 CM
LIGHTSOURCE	LUXEON M
COLOR TEMP.	2700 K
LUMEN OUTPUT	700 LM
OPTIC	FORWARD OPTIC
RATED VOLTAGE	24 V DC
DIMMABLE	YES
POWER	7.2 W
IP CLASS	IP65
INSULATION CLASS	III




## INSTALLATION

The luminaire is equipped with 1 meter neoprene cable: 05RN-F 2 x 1 MM<sup>2</sup>.  
A separate 24 V DC power supply is required to operate the luminaire.

→ pg 90 GROUND SPIKE 9012,9014

ORDER NØ.	BLACK	GREY
RAY 45	1912	1913
RAY 70	1917	1918

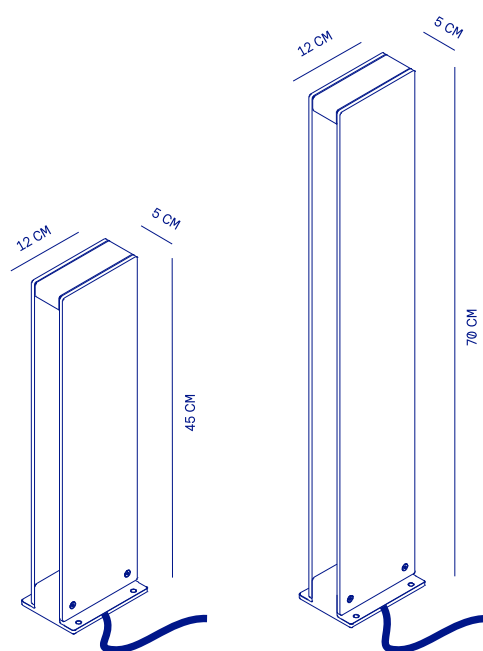

RAY 45

RAY 70