




reed

ATMOSPHERIC ACCENT LIGHTING

Transparent fixture with brushed tip and light source at the bottom. The fully IP68 cast-off luminaire has a sturdy, UV-resistant acrylic fiber optic. You can fix the lamp with the included ground pin.

SPECIFICATIONS		REED / REED BUNDLE
HEIGHT	100 CM	
LIGHTSOURCE	LUXEON REBEL	
COLOR TEMP.	2700 K	
LUMEN OUTPUT	85 LM / 5 X 85 LM	
OPTIC	FIBER OPTIC	
RATED VOLTAGE	24 V DC	
DIMMABLE	YES	
POWER	1,4 W / 4,3 W	
IP CLASS	IP68	
INSULATION CLASS	III	




INSTALLATION

The luminaire is equipped with 1 meter neoprene cable: 05RN-F 2 x 1 MM². A separate 24 V DC power supply is required to operate the luminaire. Ground spike included.

ORDER NØ.

REED	2110
REED BUNDLE	2112

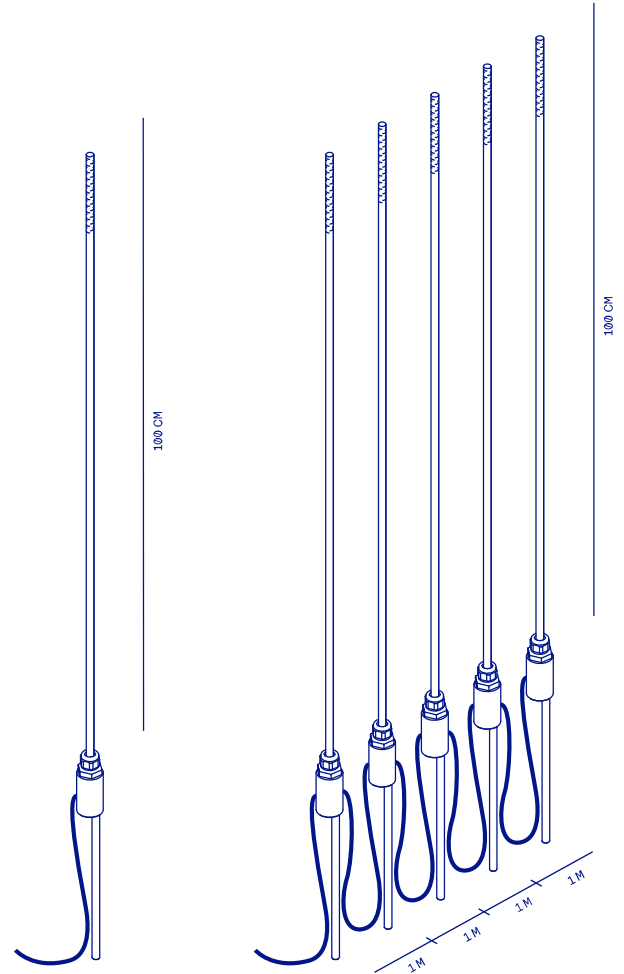

REED

REED BUNDLE